



- GENERAL NOTES:
- A. DIMENSIONS ARE GIVEN TO THE FACE OF STUD UNLESS OTHERWISE NOTED.
  - B. ALL GYPSUM WALL BOARD TO BE TYPE "X". PROVIDE MOISTURE RESISTANT GYPSUM BOARD ON WALL WALLS WITHIN TOILET ROOMS AND JANITOR CLOSETS, BEHIND CERAMIC WALL TILE, AND BEHIND OTHER FINISHES THAT HAVE MOISTURE, U.O.N.
  - C. THE DRAWINGS INDICATE LOCATION, DIMENSIONS, REFERENCE, AND TYPICAL DETAILS OF CONSTRUCTION. THE DRAWINGS DO NOT INDICATE EVERY CONDITION - WORK NOT PARTICULARLY DETAILED SHALL BE OF SIMILAR CONSTRUCTION TO PARTS THAT ARE DETAILED. THESE DRAWINGS HAVE BEEN DEVELOPED FROM RECORDS FURNISHED BY THE OWNER AND FIELD SURVEYS. MATERIALS, DIMENSIONS, WALL THICKNESS, ROUGH OPENINGS, PATTERNS, AND THE LIKE ARE INTERPRETATIONS OF THOSE RECORDS AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WITH THE WORK.
  - D. PROTECT ALL EXISTING WORK TO REMAIN FROM DAMAGE DURING CONSTRUCTION. ANY MATERIALS, SYSTEMS, COMPONENTS, FINISHES, AND THE LIKE, DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO OWNER'S ACCEPTANCE AT CONTRACTOR'S EXPENSE.
  - E. VERIFY DIMENSIONS OF EXISTING OPENINGS PRIOR TO FABRICATING AND INSTALLING NEW WALLS.
  - F. INTERIOR DEMOLITION OCCURRED WITHIN BUILDING DURING AN EARLIER PHASE. HOWEVER, IT IS ANTICIPATED THAT MINOR DEMOLITION WILL BE REQUIRED FOR INSTALLATION OF MECHANICAL AND ELECTRICAL SYSTEMS. CW/ MECHANICAL AND ELECTRICAL FOR SYSTEM LOCATIONS.
  - G. REFER TO PHASE TWO FOR ADDITIONAL INFORMATION ON FUTURE DEMOLITION AND CONSTRUCTION WITHIN BUILDING 33.
  - H. CONTRACTOR IS TO REMOVE ALL WALL MOUNTED SIGNAGE, BULLETIN BOARDS, CHART HOLDERS, ETC. PRIOR TO PAINTING UNLESS DIRECTED OTHERWISE. TURN ALL REMOVED ITEMS OVER TO THE VA. THE VA WILL BE RESPONSIBLE FOR REINSTALLATION OF ITEMS.
  - J. TEMPORARY WALLS THAT SEPARATE AREAS UNDER CONSTRUCTION FROM OTHER AREAS MUST BE METAL STUDS AT 24" ON CENTER WITH 5/8" FIRE TAPED TYPE X SHEETROCK ON ONE SIDE WITH ACCESS DOORS. TEMPORARY PARTITIONS MUST RUN FROM SLAB TO SLAB AND FROM EXTERIOR WALL OR FIRE RATED PARTITION TO EXTERIOR WALL OR FIRE RATED PARTITION. FIREBRICKS OR FIRE PLUGS MUST BE USED TO SEAL PENETRATIONS IN TEMPORARY OR PERMANENT FIRE SEPARATIONS UNTIL THEY CAN BE PROPERLY FIRE SEALED (I.E. CORE DRILLS FOR NEW SEWER LINES PRIOR TO INSTALLATION AND FIRE CAULKING OF SEWER LINES). INSTALL BARRIER PRIOR TO COMMENCING DEMOLITION AND CONSTRUCTION OF EACH AFFECTED PHASE. REMOVE BARRIER WHEN DIRECTED BY RESIDENT ENGINEER.
  - K. ASSURE THAT ALL REQUIRED BACKING IS INSTALLED IN WALLS PRIOR TO INSTALLING DRYWALL. THIS INCLUDES BACKING FOR WALL-MOUNTED DOORSTOPS.

- # SHEET NOTES:
- ONE HOUR RATED MECHANICAL SHAFT. CONSTRUCT SHAFT WITH CONTINUOUS SHAFT WALL CONSTRUCTION FROM GROUND FLOOR TO ATTIC. CLEAR SIZE OF SHAFT SHALL BE 5'-0" WIDE X 9'-0" LONG. MAINTAIN CONSTANT CLEAR WIDTH AND LENGTH ENTIRE HEIGHT OF SHAFT. REF: A1.1-3.
  - INFILL PORTION OF WALL, FROM PREVIOUS DOOR OPENING WITH METAL STUDS SO THAT INFILL STUDS ALIGN WITH OUTSIDE FACE OF EXISTING PLASTER WALL.
  - EXISTING CONSTRUCTION TO REMAIN.
  - SHIM SPACE BEHIND SHAFT WALL AS REQUIRED TO PROVIDE A CONTINUOUS SHAFT.
  - PATCH/INFILL AROUND DUCTWORK AS NEEDED AFTER MECHANICAL EQUIPMENT HAS BEEN INSTALLED, CW/ MECHANICAL FOR LOCATION OF EQUIPMENT.
  - REMOVE (E) TEMPORARY WALL FOR (N) MECHANICAL LOUVER.
  - REMOVE PORTION OF WALL AS NEEDED TO ALLOW MECHANICAL EQUIPMENT TO PASS THROUGH. CW/ MECHANICAL FOR LOCATION AND SIZE OF MECHANICAL EQUIPMENT. CW/ WITH STRUCTURAL FOR INFORMATION REGARDING ADDITIONAL SUPPORT AT OPENINGS.


- LEGEND:
- 1 HOUR RATED SHAFT
  - NEW CONSTRUCTION
  - EXISTING CONSTRUCTION
  - FUTURE CONSTRUCTION
  - EXISTING CONSTRUCTION ABOVE

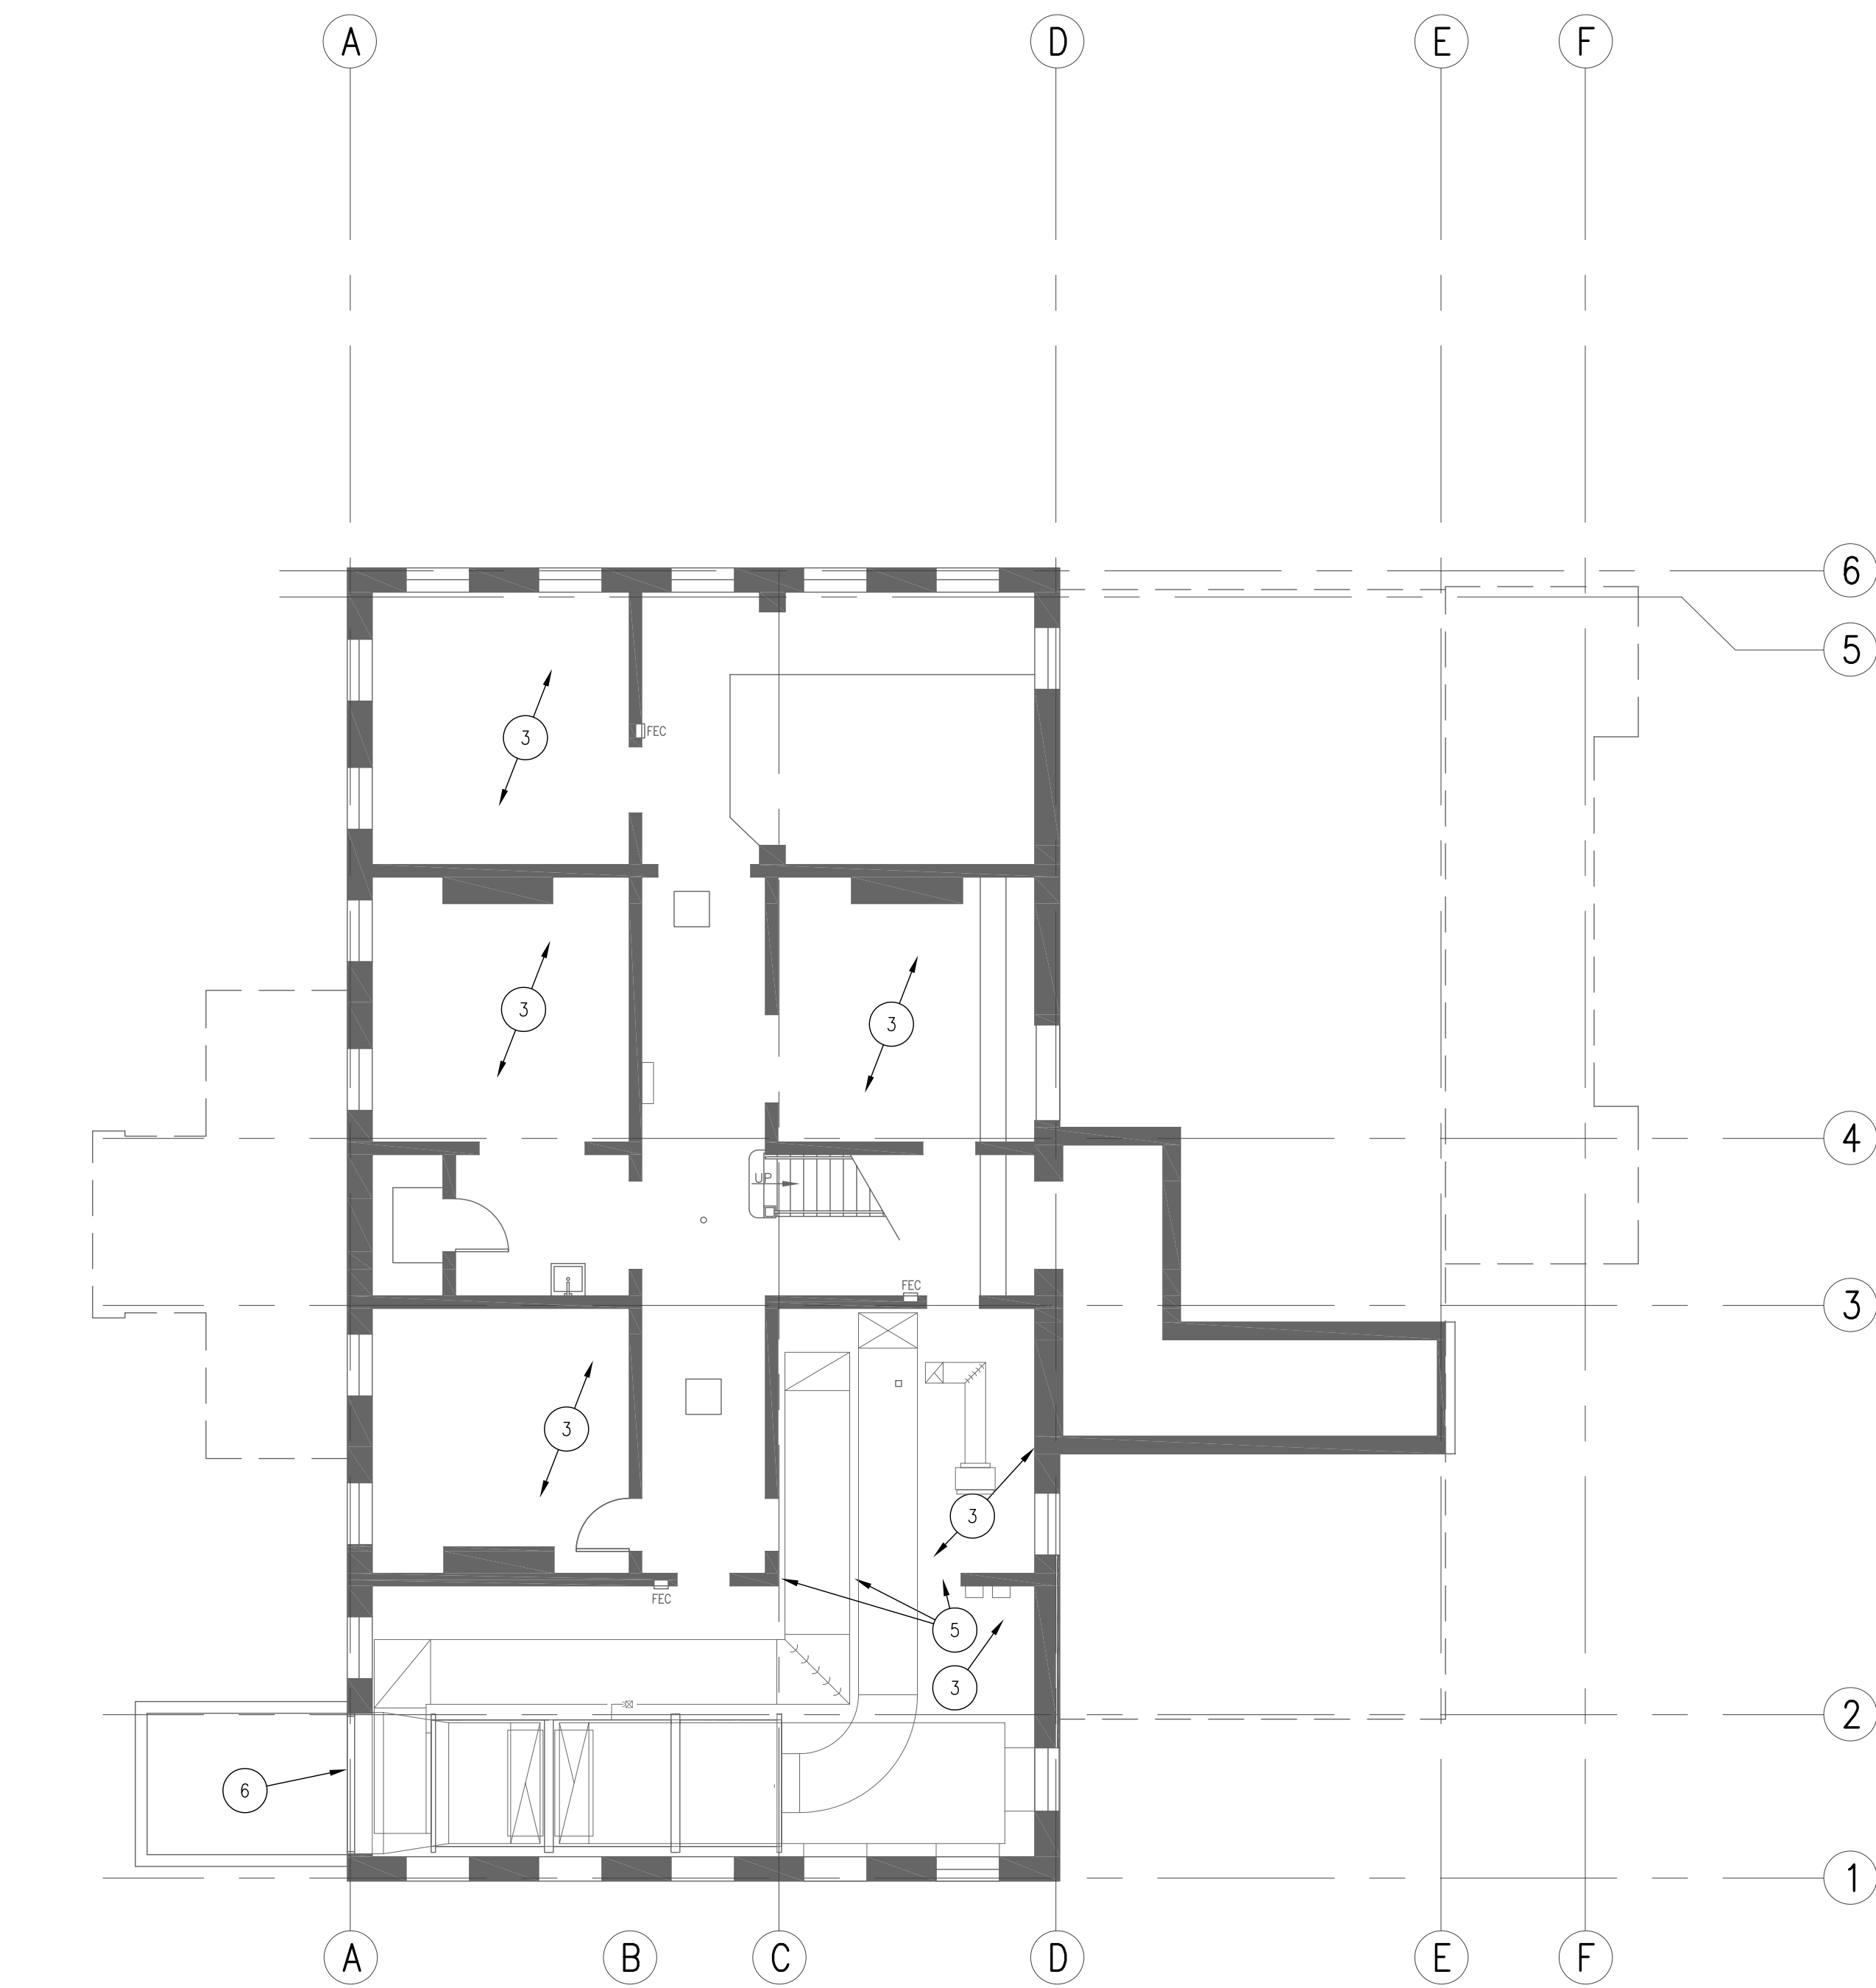


1 GROUND FLOOR PLAN BLDG. 33

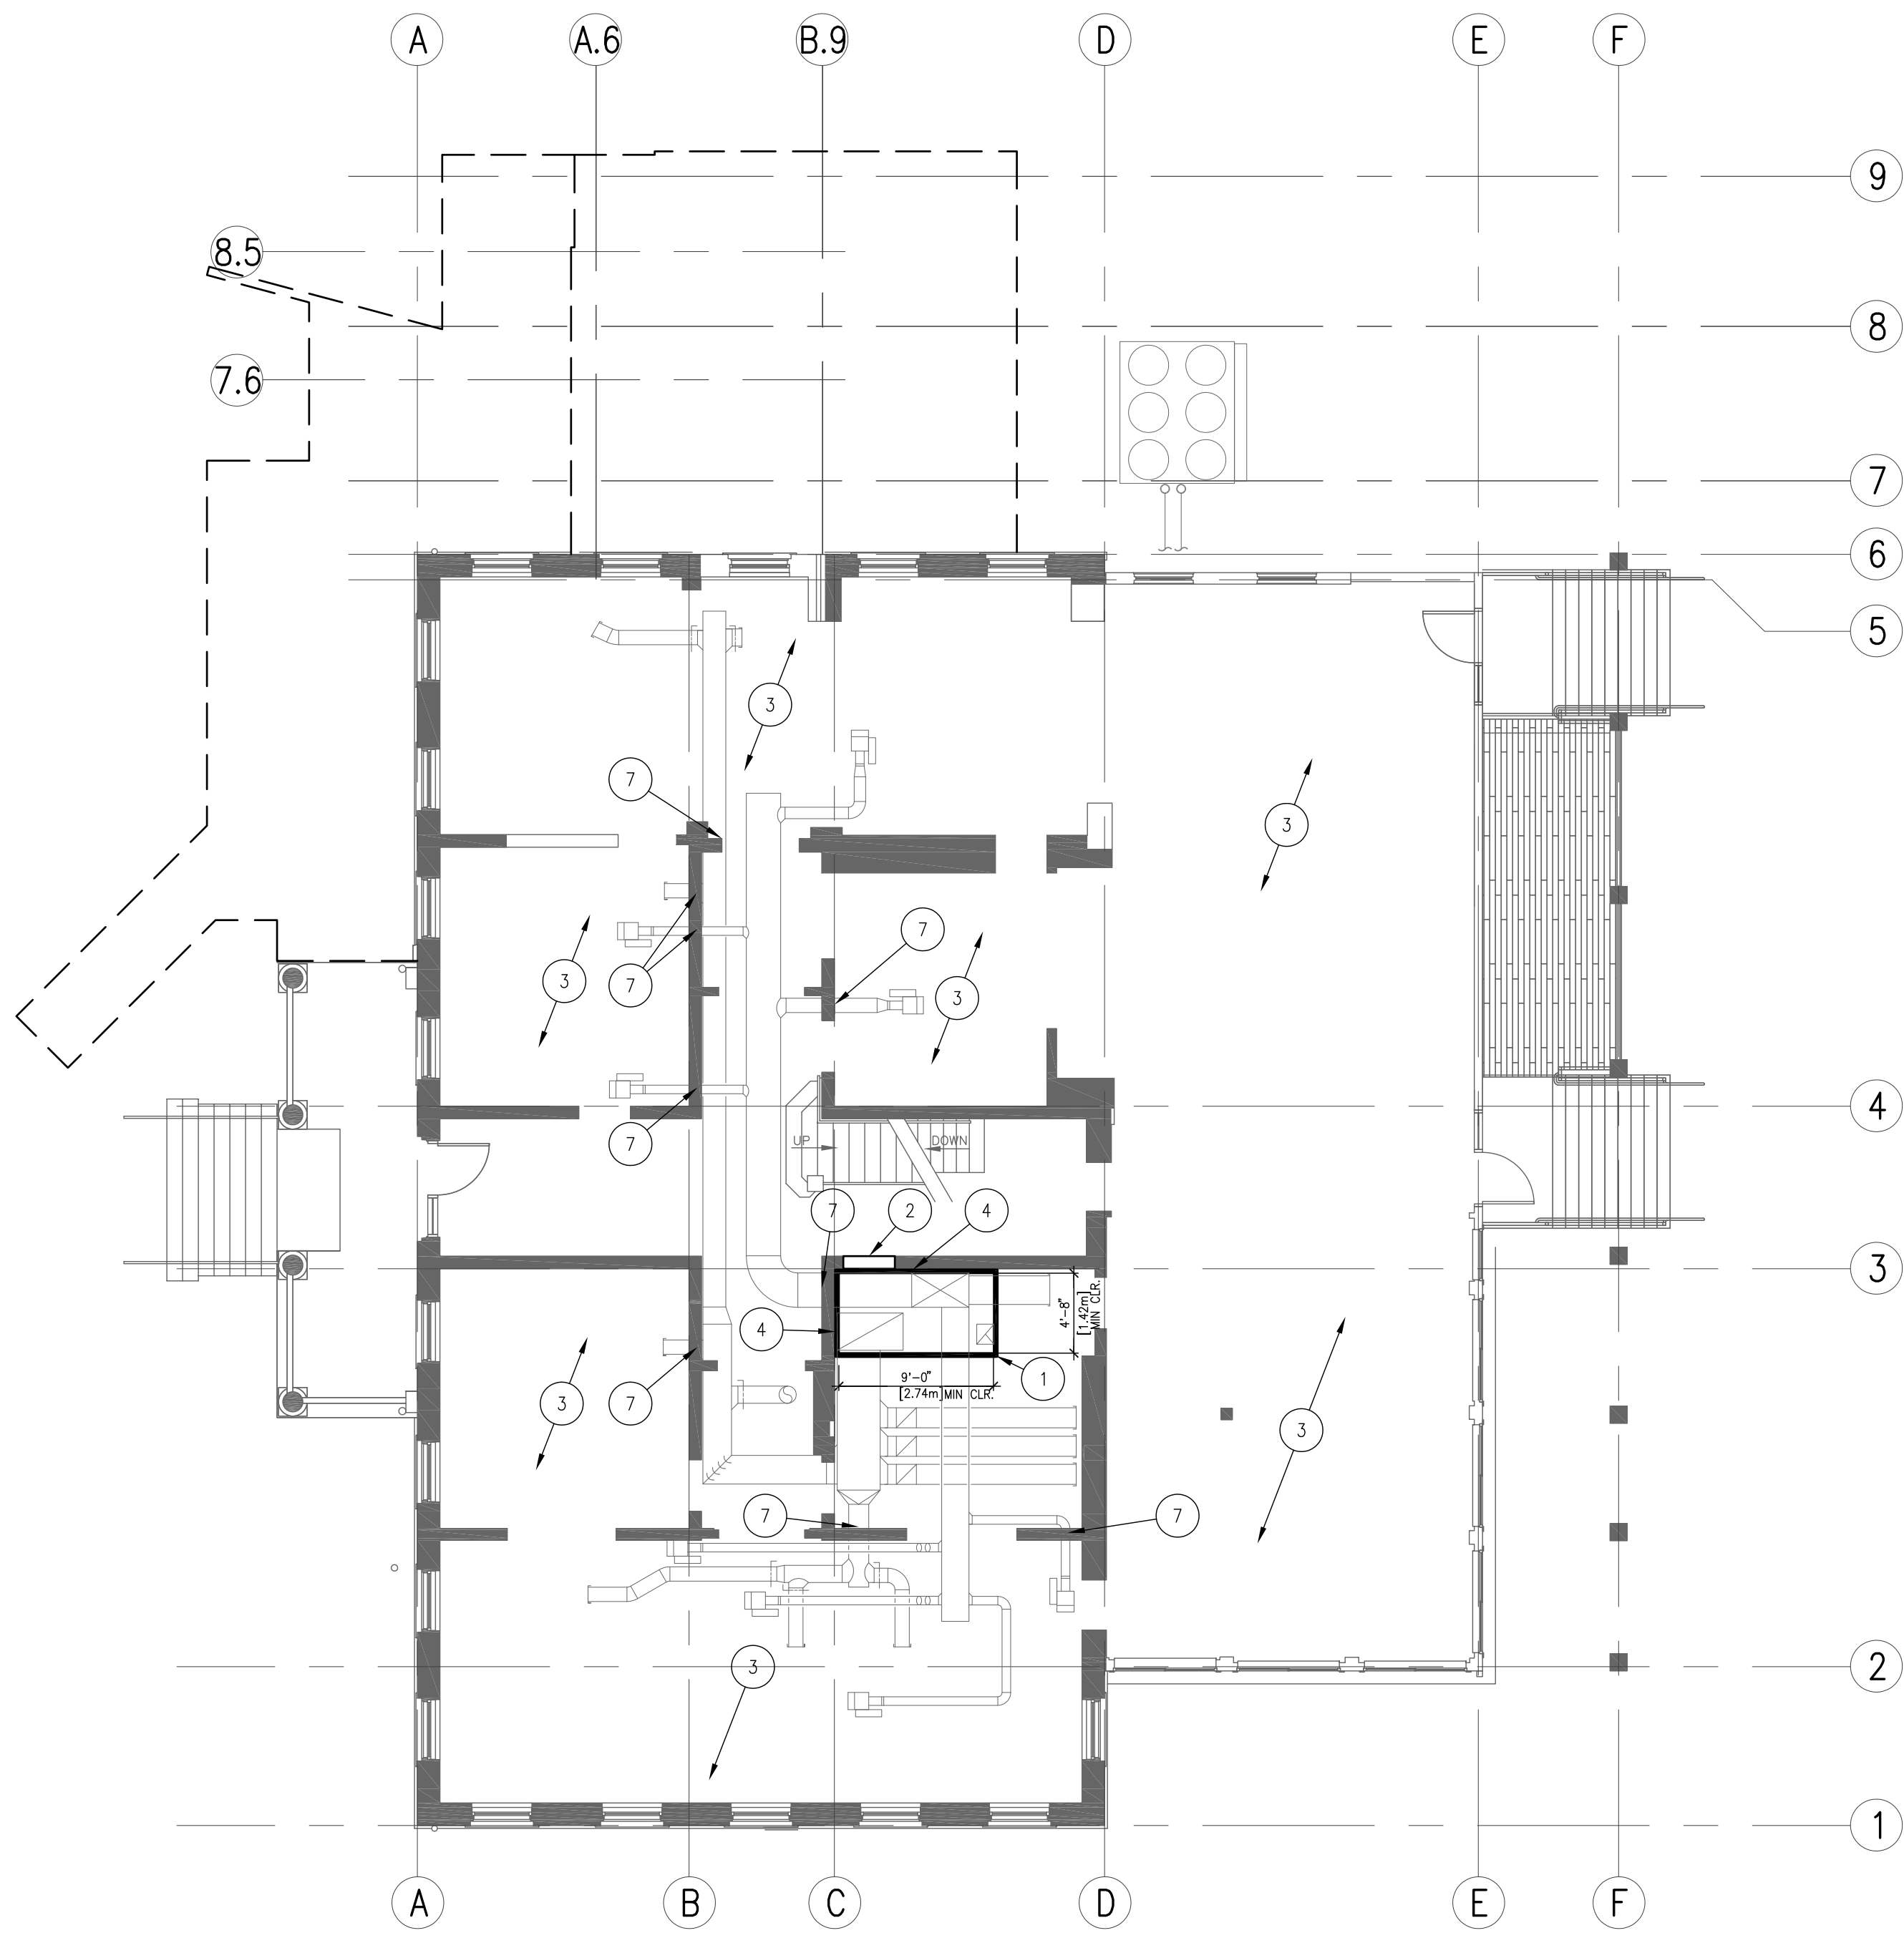

2 FIRST FLOOR PLAN BLDG. 33



SCALE: 1/8" = 1'-0"

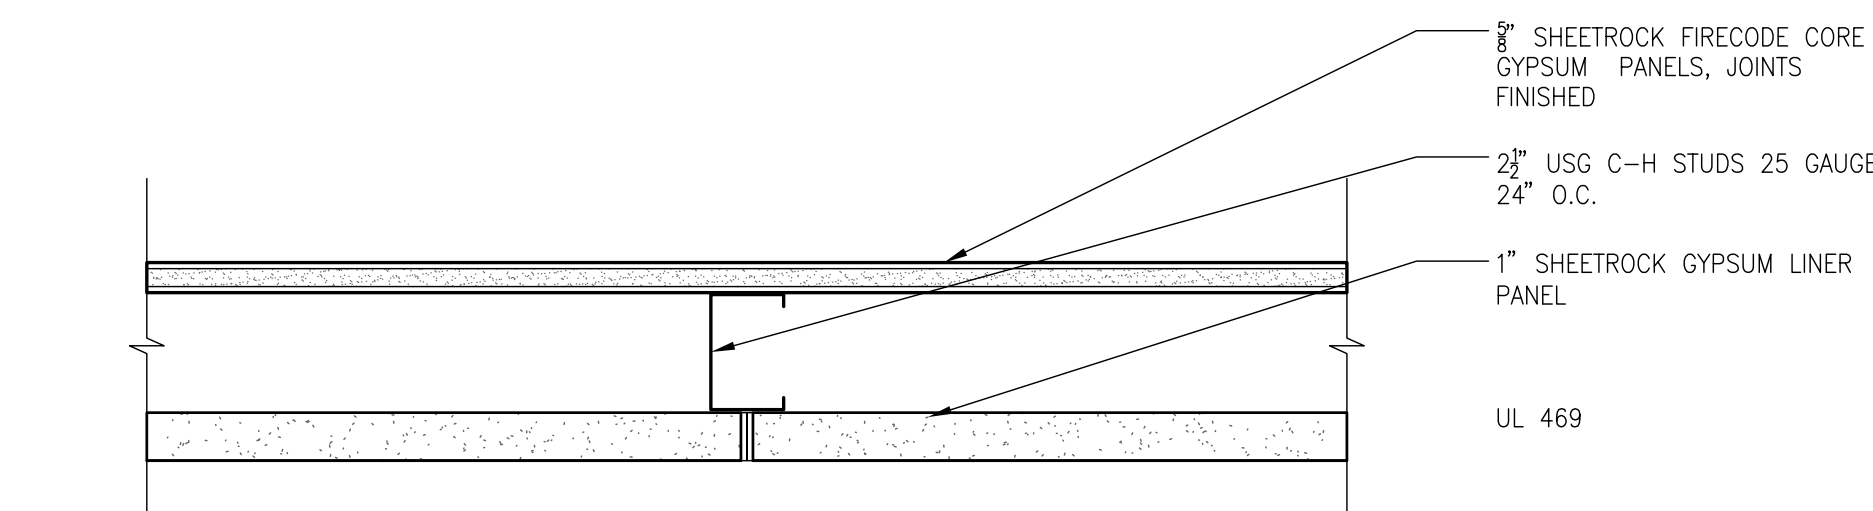

3 1 HOUR RATED SHAFT WALL

SCALE: 3\"/>

95% SUBMISSION

REVISIONS

DATE

CSHQ

C.W. MOORE PLAZA  
250 S. 5TH ST. • BOISE, ID 83702  
(208) 343-4635 • FAX (208) 343-1858  
http://www.cshqa.com

JOHN D. MAULIN, ARCHITECT

C.W. MOORE PLAZA  
250 S. 5TH ST.  
BOISE, IDAHO  
PHONE: (208) 343-4635 FAX: (208) 343-1858

THESE DRAWINGS AND SPECIFICATIONS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT / ENGINEER. WHICHEVER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT. THESE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED BY ANY PERSON OR ENTITY, ON OTHER PROJECTS, FOR ADDITIONS TO THE PROJECT, OR COMPLETION OF THE PROJECT, WHEN PHASED, WITHOUT THE WRITTEN CONSENT OF CSHQA OR ITS AFFILIATES. Copyright © 2011

STAMP

PRELIMINARY  
NOT FOR  
CONSTRUCTION

DRAWING TITLE

FLOOR PLANS AND DETAILS

APPROVED: DIVISION CHIEF

APPROVED: SERVICE DIRECTOR

PROJECT TITLE

VAMC  
ENERGY UPGRADES  
PHASE ONE BUILDING 33

BUILDING NUMBER

33

LOCATION

BOISE, IDAHO

CHECKED

JMO

DRAWN

BKS

DATE

03/03/11

PROJECT NO.

531-10-114

DRAWING NO.

A1.1

DWG. 02 OF 32

